

12mm Size Insulated Shaft Type EC12 Series

● Detail

➤ Standard Type


Part number		EC12E1220407
Actuator length		15mm
Torque		Standard 3 to 20mN·m
Number of detent		12
Number of pulse		12
Operating direction		Vertical
Operating temperature range		-10°C to +70°C
Electrical performance	Ratings	0.5mA 5V DC
	Output signal	Two phase A and B
	Max./min. operating current(Resistive load)	5mA/0.5mA
	Insulation resistance	10MΩ min. 50V DC
	Voltage proof	50V AC for 1 minute
Mechanical performance	Detent torque	3 to 20mN·m
	Push-pull strength	80N
Durability	Operating life	30,000 cycles
Minimum order unit (pcs.)	Japan	2,400
	Export	2,400
3D CAD (STEP)		
Certificate of Compliance to RoHS regulations		

● Photo




Short shaft

• Dimensions

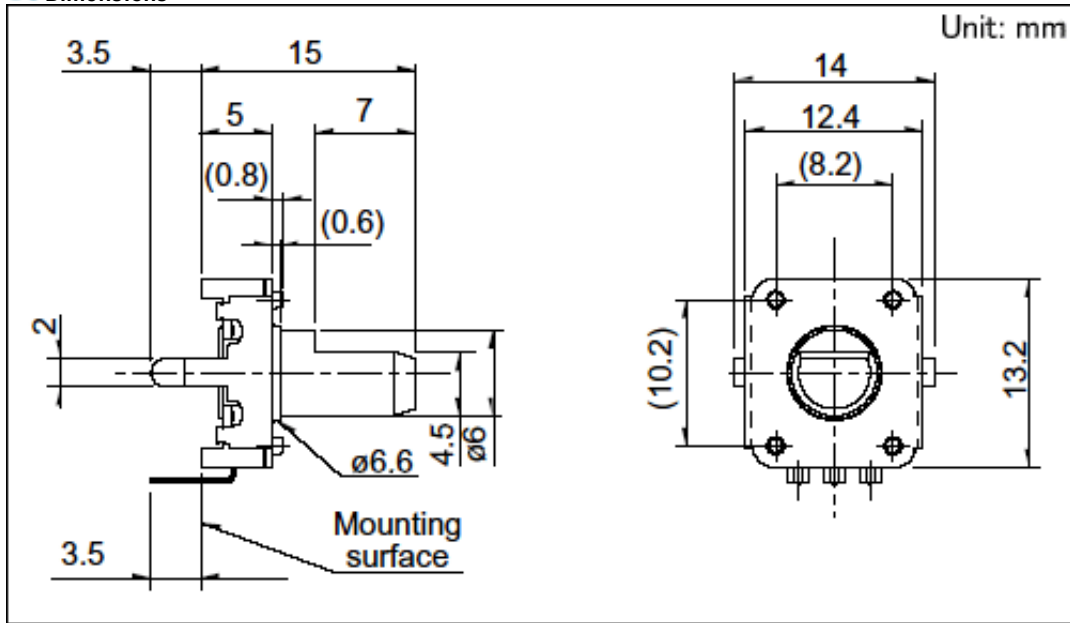


• Mounting Hole Dimensions

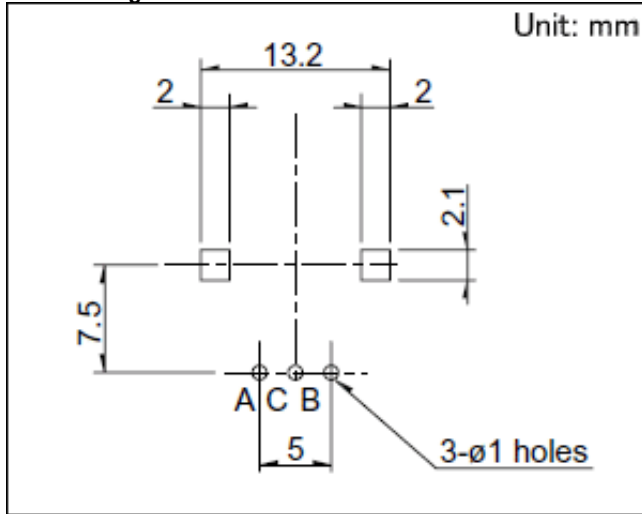


Viewed from mounting face.

• Output Wave

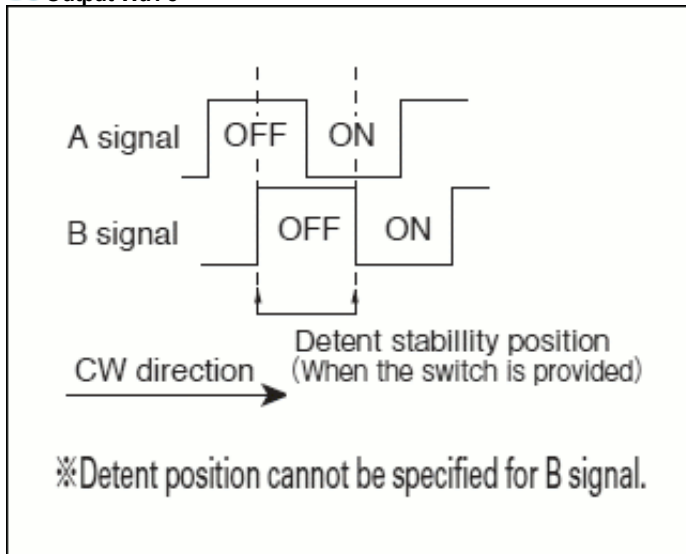

• Sliding Noise

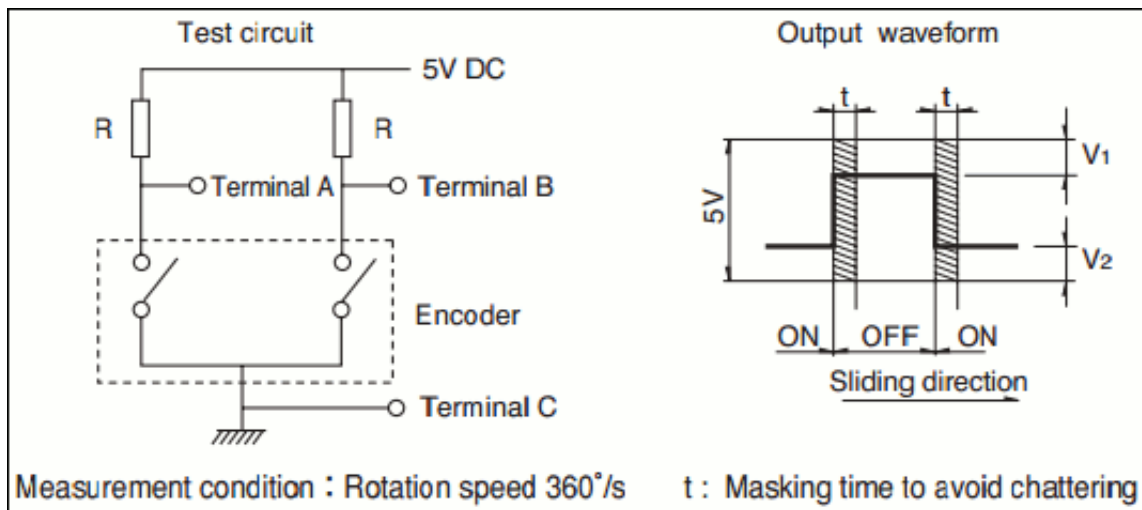

V1=V2=1.5V max.

At R=10kΩ Chattering: 3ms max. Bounce: 2ms max.

●● Packing Specifications

Tray

Number of packages (pcs.)	1 case / Japan	2,400
	1 case / export packing	2,400
Export package measurements (mm)		369×525×204

●● Soldering Conditions

Reference for Dip Soldering

Preheating	Soldering surfacetemperature	100°C max.
	Heating time	1 min. max.
Dip soldering	Soldering temperature	260±5°C
	Soldering time	3±1s
No. of solders		2 time max.

Reference for Hand Soldering

Tip temperature	350°C max.
Soldering time	3s max.
No. of solders	1 time

>> NOTE

Notes are common to this series/models.

1. This site catalog show s only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. Products other than those listed in the above chart are also available. Please contact us for details.
4. Nuts and washers are not included. If required, please contact us.
5. This products can be used in vehicles. (EC12D only)
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.



Inquiries about Products

For more information please contact: Products Information Center.

1-7, Yukigaya-otsukamachi, Ota-ku, Tokyo, 145-8501, Japan

Phone: +81 (3) 5499-8154